



KONICA MINOLTA

magicolor 2450



Compact
Network
Color Laser



KONICA MINOLTA

800-523-2696

buymagicolor.com

Compact Network Color Laser



QUICK SPECS

- 20 ppm in black & white, 5 ppm in color
- 300 MHz PowerPC® processor
- 9600 x 600 dpi-class Photo ART contone resolution
- 128 MB DDR SDRAM std., 640 MB max.
- 10/100BaseTX Ethernet®, USB 2.0, and parallel interfaces
- First page out in 12 seconds (b&w), 21 seconds (color)
- PostScript® 3 (144 fonts) and PCL® 6 (93 fonts) printer emulations
- Windows®, Macintosh®, and Linux® compatible
- 35,000 page-per-month duty cycle
- 1-year exchange warranty

Versatile desktop printer with high-end printing features and enhanced graphics quality.

Compact and Affordable

This little dynamo fits your desktop and your budget.

- A true desktop printer that fits easily into any environment, the magicolor 2450 provides simple, full-front access for reloading supplies and clearing media jams, so there's no need to access the back of the machine.
- Long-lasting toner yields 1,500 (standard capacity) or 4,500 (high capacity) prints for low cost-per-page printing.

Designed for Ease of Use

Easy setup and operation make the magicolor 2450 a breeze to use.

- Pre-installed 4,500-page toner cartridges mean the magicolor 2450 is up and running in just a few minutes.
- Auto-run installation software automatically detects the printer on your network and guides you step-by-step through setup.
- Comprehensive printer drivers simplify printing with options such as collation, fit-to-page scaling, separation pages, watermarks, tray selection, and secure printing.
- The desktop Status Monitor utilizes a pop-up window on your screen for notification of print job status and supply levels.
- The PageScope™ suite of printer management utilities provides real-time consumables status, as well as remote printer management and configuration.

Brilliant, Consistent Color

Innovative color technology for outstanding image quality.

- 9600 x 600 dpi-class Photo ART contone resolution generates over 4,000 colors per dot, providing enhanced photographic detail and smooth color gradients.
- Enhanced Automatic Image Density Control (eAIDC) automatically calibrates the printer so you can count on consistent, accurate color from the first page to the last.
- Automatic ICC-based color matching provides single-button controls for automatic color correction of print files.
- KONICA MINOLTA's Simitri® Polymerized Toner produces sharp output, fine text, and better halftones. It also reduces toner consumption by up to 30%, keeps the printer cleaner, and is more environmentally friendly than other toner technologies.



*B&W cost per page based on 5% coverage
Color cost per page based on 20% coverage*

Packed with Printing Power

Built to process even the most complex jobs in a flash.

- Emperon, a state-of-the-art printing architecture, provides compatibility with most popular operating systems, print languages, and network environments. It dramatically enhances printer performance and image quality while simplifying the entire printing process.



Get the competitive edge with vibrant color quality.

- 300 MHz PowerPC CPU provides the power you need for processing complex files, including graphics and images.
- 128 MB DDR SDRAM doubles file data throughput and delivers your print job quickly.
- 10/100BaseTX Ethernet interface provides high-speed network printing for busy workgroups. USB 2.0 and parallel ports are also included for stand-alone operation.



basics

options

FRONT KEYPAD

- Intuitive display and menu
- At-a-glance toner gauges

PRINT SPEED

- Color: Up to 5 ppm
- B&W: Up to 20 ppm

INTERFACES

- Ethernet (10/100BaseTX), Hi-Speed USB 2.0, Parallel, USB 1.1 Host Port (for future expansion)

MEMORY

- 128 MB RAM

COMPATIBILITY

- Windows Server 2003/XP/2000/NT4/Me/98SE
- Macintosh OS X (v10.2+)/OS 9 (v9.1+)
- Linux Red Hat 9/SuSE 8.2
- PostScript 3, PCL 6 emulations

RESOLUTION

- 9600 x 600 dpi-class with Photo ART
- eAIDC and ICC-based color matching

PAPER SIZE AND INPUT

- Up to legal (8.5" x 14")
- Adjustable 200-sheet multipurpose tray



HARD DISK

- For downloaded fonts, forms, and profiles; electronic collation; Job Accounting; direct PDF printing; Proof then Print, Secured Job, Print & Hold, and Stored Job functions

MEMORY


- Upgrade to 640 MB

DOCUMENT HANDLING

- Automatic duplexer for two-sided printing

PAPER INPUT

- 500-sheet cassette (letter or A4)
- 700-sheet maximum input capacity

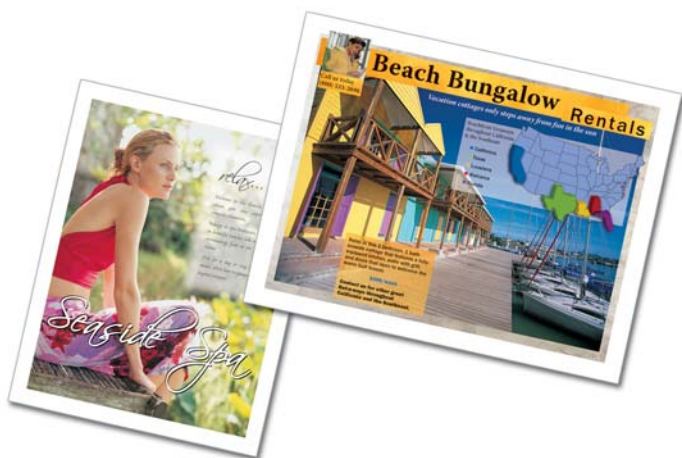

Multi-Environment Compatibility

Perfect for diverse office workgroups.

- PostScript 3 and PCL 6 printer emulations support popular software applications, allowing the seamless creation and processing of all your color documents.
- Window, Macintosh, and Linux system compatibility offers support for mixed workgroups.
- Mixed network support for NetWare®, TCP/IP, EtherTalk®, and NetBIOS/NetBEUI ensures smooth integration into your network configuration.





magicolor 2450 – Technical

Printing Process

Print Method: Electrophotographic laser

Print Speed*:

Color: Up to 5 ppm

Monochrome: Up to 20 ppm

Warm-Up Time: 45 seconds average

First-Page-Output Time*:

Color: 21 seconds from an idle, ready state

Monochrome: 12 seconds from an idle, ready state

Resolution: Up to 9600 x 600 dpi-class with Photo ART

Recommended Duty Cycle: Up to 35,000 prints/month

Hardware and Software Capabilities

Processor Type: PowerPC, 300 MHz

Memory: 128 MB DDR SDRAM on board, upgradeable to 640 MB (one slot) using 100-pin, 266 MHz, PC-2100 DIMMS

Internal Hard Disk (optional): For downloaded fonts, forms, and profiles; electronic collation; Job Accounting; direct PDF printing; Proof then Print, Secured Job, Print & Hold, and Stored Job functions (40 GB)

Operating System Compatibility: Windows Server 2003/XP/2000/NT4 (SP6+)/Me/98SE;

Macintosh OS X (v10.2+)/OS 9 (v9.1+); Linux Red Hat 9/SuSE 8.2

Printer Emulations: PostScript 3, PCL 6, PDF 1.4 (hard disk required)

Printer Management: PageScope Net Care, PageScope Web Connection, PageScope Network Setup, PageScope Peer-to-Peer Printing Tool, PageScope EMS Plug-in, HP Web Jetadmin Plug-in, PageScope Plug and Print, PageScope NDPS Gateway, Print Monitor, Status Monitor

Color Support: Enhanced Automatic Image Density Control (eAIDC), ICC device profiles; Automatic ICC-based color matching; Dynamic Contone Screening; SWOP, Commercial, EuroColor, TOYO, and DIC press emulations; PANTONE® Color tables

Interface Support

Standard: Ethernet 10/100BaseTX; IEEE 1284 parallel (supports Microsoft 'Plug and Play');

USB 2.0 (supports Microsoft 'Plug and Play'); USB 1.1 Host Port (for future expansion)

Ethernet Protocols: TCP/IP, EtherTalk, IPX/SPX (NetWare 4/5/6), NDS Bindery, NDPS, NetBEUI, NetBIOS, UPnP, SMB, UDP, HTTP, HTTPS, IPP1.1, SNMP, LPD, FTP, DHCP, BootP, ARP, Auto IP, Ping/ARP, SMTP, SLP, TCP/IP socket

Media Handling

Standard Paper Input: 200-sheet multipurpose tray

Optional Paper Input: 500-sheet cassette

Standard Paper Output: 200-sheet face-down output tray

Duplex Printing: Manual** (automatic optional)

Paper Sizes Supported:

Multipurpose Tray: Letter, Legal, A4, Executive, Statement, Folio, Foolscap, UK Quarto, Letter Plus, Govt. Letter, Govt. Legal, A5, B5 (ISO), Kai 16; Japanese Postcard, Double Postcard; Monarch, Com 10, DL, C6, C5, Chou #3, Chou #4, You #4, 16K, 32K Envelopes; Custom sizes (W) 3.6" - 8.5" (92 - 216 mm), (L) 5.8" - 14" (148 - 356 mm)

500-Sheet Cassette (optional): Letter, A4

Printable Area: 0.16" (4 mm) from all edges; 13.2" (335.6 mm) color and 13.7" (347.6 mm)

monochrome guaranteed print length

Paper Weights:

Plain paper: 16 - 24 lb. Bond (60 - 90 g/m²)

Thick stock: 24 - 90 lb. Index (90 - 163 g/m²)

Print Media: Plain paper, letterhead, thick stock, glossy stock, transparencies, laser-quality labels, postcards, and envelopes

Physical

Type: Laser printer with internal controller

Dimensions (with tray cover) (WxDxH): 16.9" x 19.8" x 13.4" (430 x 502 x 341 mm)

Weight: w/o consumables: 39.6 lbs. (18 kg); w/ consumables: 44 lbs. (20 kg);

as shipped: 54.5 lbs. (24.8 kg)

Electrical

Power Requirements:

120V Model: 120 VAC ± 10%; 50/60 Hz ± 3%

220/240V Model: 220/240 VAC ± 10%, 50/60 Hz ± 3%

Power Consumption:

Operating: 600 W average, 1,100 W maximum

Standby: 250 W or less

Energy Star Compliant:** 28 W or less

Environmental

Temperature Requirements: Operating: 50° to 95° F (10° to 35° C)

Non-operating: 32° to 95° F (0° to 35° C)

Humidity: Operating: 15% to 85% RH

Non-operating: 10% to 85% RH

Noise Levels: Operating: <53 dB(A); Standby: <39 dB(A)

Regulatory/Safety Conformity

UL, cUL, CSA, FCC-B, CDRH, DOC, SASO, RPC, NOM

Consumables****

In-Box Cartridges: Printer ships with one each Cyan, Magenta, Yellow, and Black Toner Cartridges (yield up to 4,500 letter/A4 pages @ 5% coverage); Drum Cartridge

Replacement Cartridges: Cyan, Magenta, and Yellow Toner Cartridges (yield up to 1,500 or 4,500 letter/A4 pages @ 5% coverage); Black Toner Cartridge (yields up to 4,500 letter/A4 pages @ 5% coverage)

Typefaces

144 resident PostScript fonts, 93 PCL fonts, and 10 line printer fonts

Warranty

1-year exchange

* Exact print speed differs depending on system configuration, software application, driver, and document complexity.

** Application software support required for page reordering.

*** The addition of some options, in some combinations, may cause the product to become non-compliant. Energy Star compliance does not represent an EPA endorsement of any product or service.

**** The stated life expectancy of each consumable in your printer is based on printing under specific operating conditions such as page coverage for a particular page size (5% coverage of letter/A4). The actual consumable's life will vary depending on the use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature, and humidity.



Simitri



KONICA MINOLTA
PRINTING SOLUTIONS U.S.A., INC.
(USA, Canada, Latin America)
Tel.: +1 (800) 523 2696
Tel.: +1 (251) 633 4300
Fax: +1 (251) 639 4490

Websites:
buymagicolor.com
printer.konicaminolta.com
q-shop.com

PN: mc2450Ss01_06